

DryLin® SHT | Product Range | Trapezoidal Leadscrew

SHTC-HYD – Hygienic design




Order key
complete ▶ page 897

SHTC-20-EWM-HYD



Based on the „hygienic design“ idea, this version offers an easily flushable solution. Even screw connections are designed easily accessible and the gap dimensions accordingly generous. The materials used are plastic and VA stainless steel.

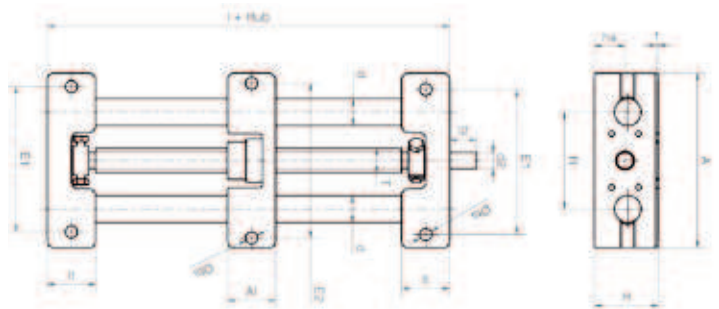

FDA-complied material for linear slide module available.

Dimensions [mm]

Part number	A	Al	H	E1	E2	I	H	f	lt	ts	d	T	l2	d2	ha
	-0.3	-0.3		±0.15	±0.15										
SHTC-20-EWM-HYD	130	35	48	108	115	108	72	2	36	9.0	20	TR 18 x 4	26	12 h9	23

Available accessories ▶ page 922

Assembly in combination with following bearing materials:



iglidur® J
Standard till +90 °C



iglidur® X
for temperatures up to +250 °C
High chemical resistance



iglidur® A180
for applications with food contact (FDA)



delivery 8–14 days
time



prices price list online
www.igus.eu/eu/SHT



order part number
example SHTC-20-EWM-HYD