

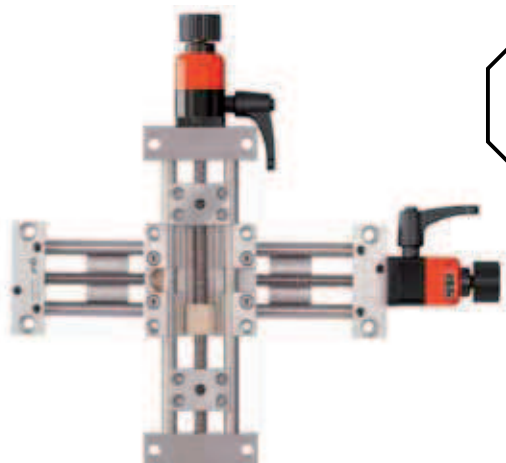
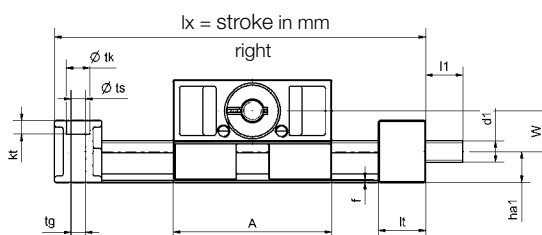


SLW – compact XY-table – stainless steel

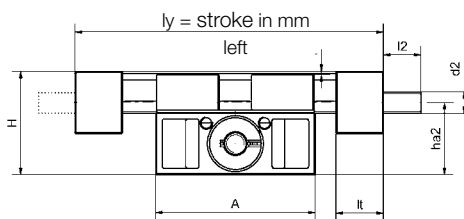

- For manual adjustments
- Flat and compact
- High torsional stability (stiffening)
- Complete design with stainless steel 316
- 100 % lubrication-free
- chemical- and corrosion-resistant
- Available accessories ► **page 922**

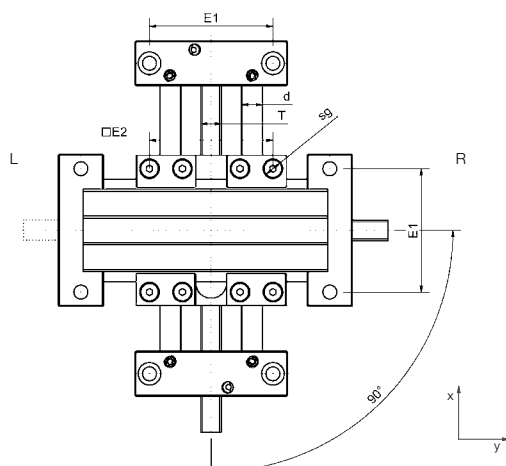

Dimensions [mm]

Part number	A	H	E1	E2	Base length	Base length	f	lt	tk	ts	tg	kt
	-0.3		±0.15	±0.15	lx	ly			±0.1			
SLW-XY-ESJ-1040	74	48	60	60	117	117	1.5	22	11	6.6	M8	6.4

Dimensions [mm]

Part number	sg	d	T	l1	d1		l2	d2		ha1	ha2	W ha2- ha1
					Standard	Alternative		Standard	Alternative			
SLW-XY-ESJ-1040	M6	10	TR 10 x 2	17	TR 10 x 2	6 h9	17	TR 10 x 2	6 h9	14.5	33.5	19

The rotary knob on the y-axis can be ordered installed on the left or on the right side.

Left: SHT-XY-ESJ-1040-AWM-L-200-300 for 200 mm stroke length on the x-axis and 300 mm on the y-axis

Right: SHT-XY-ESJ-1040-AWM-R-200-300 for 200 mm stroke length on the x-axis and 300 mm on the y-axis

