

iglidur® Tribo-Tape | Product range

For use in visible areas – iglidur® B160



Order key

| Type | Dimensions [mm] | Options |
|----------------------------------|-----------------|---------------|
| B160 - T - 005 - 0020 - G | | |
| iglidur® material | Tape | Thickness |
| | | Width |
| | | Adhesive back |

G = with adhesive back

Especially where the iglidur® Tribo-Tape is a visible part, the new black option now offers even more creative freedom. Furthermore the wear resistance compared to variants made of iglidur® A160 has been improved once again.



Tribo-Tape made from iglidur® B160 with adhesive back

Temperature -40°C up to $+90^{\circ}\text{C}$

Dimensions [mm]

| Thickness | Thickness tolerance | Width | Width tolerance | Part No. | Part No. with adhesive back ¹¹²⁾ |
|-----------|---------------------|-------|-----------------|------------------------|---|
| 0.5 | ± 0.1 | 20 | ± 0.5 | B160-T-005-0020 | B160-T-005-0020-G |
| 0.5 | ± 0.1 | 50 | ± 0.5 | B160-T-005-0050 | B160-T-005-0050-G |
| 0.5 | ± 0.1 | 100 | ± 0.5 | B160-T-005-0100 | B160-T-005-0100-G |
| 0.5 | ± 0.1 | 500 | ± 1.0 | B160-T-005-0500 | B160-T-005-0500-G |

¹¹²⁾ Adhesive thickness tolerance: ± 0.015 mm



Individual widths upon request


Continuously from 20–500 mm



Cutting service

Design Tribo-Tape flexibly

► www.igus.eu/custom-tape

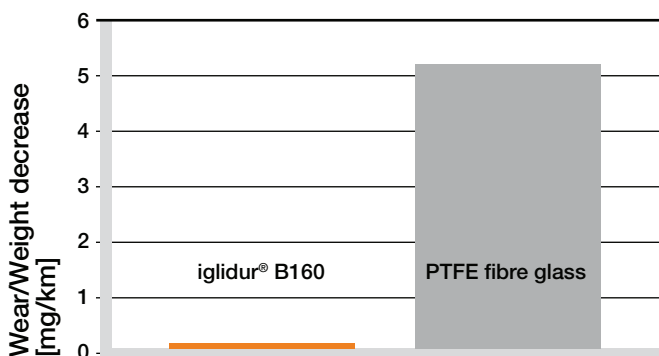

Linear wear against stainless steel pin (1.4305)

$F = 10$ N, $v = 9,600$ mm/min