


yei

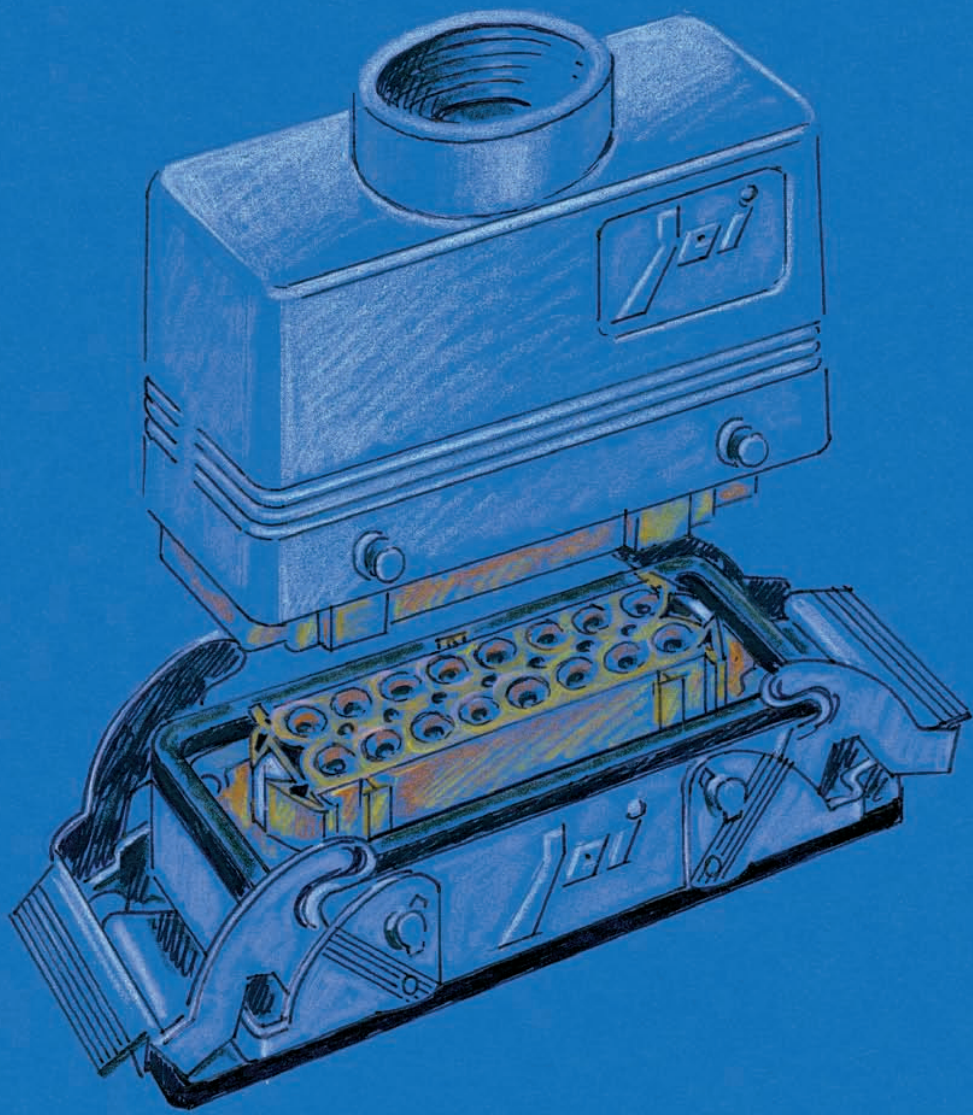

inserts:		page
CDD	24 poles + ⊕	59
CQE	10 poles + ⊕	80
CSH	6 poles + ⊕	88
CCE	6 poles + ⊕	94
CNE, CSE, JCNE, JCSE	6 poles + ⊕	95 and 106
CSS	6 poles + ⊕	118
CT, CTE, CTSE *)	6 poles + ⊕	126 and 130
MIXO	2 modules	156÷195

insert centre distance:
44 x 27 mm

bulkhead mounting housings with single lever with galvanised steel lever



lever in galvanised steel

bulkhead mounting housings with single lever with galvanised steel lever



lever in galvanised steel

description

part no.

part no.

with lever, size "44.27"

JCVI 06 L

with lever and plastic cover, size "44.27"

JCVI 06 LP

*) can be used only in bulkhead mounting housings




dimensions in mm

dimensions in mm

panel cut-out for bulkhead mounting housings in mm

JCVI L

JCVI LP

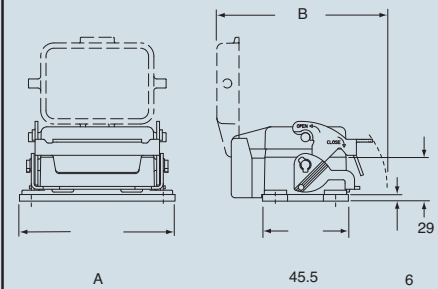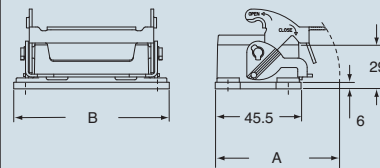

type	A	B
JCVI 06	52	70

type	A	B
JCVI 06 L	66	82.5

type	A	B
JCVI 06 LP	82.5	89

NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.



dimensions shown are not binding and may be changed without notice

JEI - size 44.27

inserts:		page
CDD	24 poles + ⊕	59
CQE	10 poles + ⊕	80
CSH	6 poles + ⊕	88
CCE	6 poles + ⊕	94
CNE, CSE, JCNE, JCSE	6 poles + ⊕	95 and 106
CSS	6 poles + ⊕	118
MIXO	2 modules	156÷195

insert centre distance:
44 x 27 mm

surface mounting housings
with single lever with galvanised steel lever



lever in galvanised steel

surface mounting housings
with single lever with galvanised steel lever




lever in galvanised steel

description	part no.		part no.		part no.		part no.	
	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M
with lever, size "44.27"								
	JCVP 06 L	16	JMVP 06 L20	20				
with lever and cover, size "44.27"					JCVP 06 LP	16	JMVP 06 LP20	20

NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

dimensions in mm


JCVP L - JMVP L

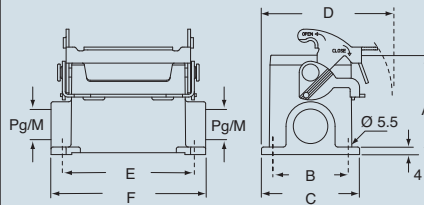

type	A	B	C	D	E	F
JCVP - JMVP	53	40	52	70	70	82

dimensions in mm

JCVP 06 LP - JMVP LP

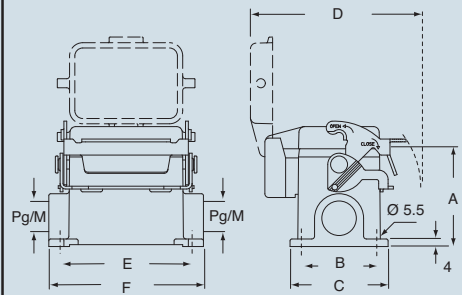

type	A	B	C	D	E	F
JCVP - JMVP	53	40	52	91	70	82

JEI - size 44.27



dimensions shown are not binding
and may be changed without notice

inserts:		page
CDD	42 poles + ⊕	61
CQE	18 poles + ⊕	81
CSH	10 poles + ⊕	89
CCE	10 poles + ⊕	96
CNE, CSE, JCNE, JCSE	10 poles + ⊕	97 and 107
CSS	10 poles + ⊕	119
CT, CTE, CTSE *)	10 poles + ⊕	127 and 131
CMSE	3+2 (aux) poles + ⊕	135
CMCE	3+2 (aux) poles + ⊕	134
CX	8/24 poles + ⊕	151
MIXO	3 modules	156÷195


insert centre distance:
57 x 27 mm

bulkhead mounting housings with single lever with galvanised steel lever



lever in galvanised steel

bulkhead mounting housings with 2 levers and galvanised steel lever



lever in galvanised steel

description

part no.

part no.

with lever, size "57.27"

JCVI 10 L

with lever and plastic cover, size "57.27"


JCVI 10 LP

with levers, size "57.27"

JCVI 10

*) can be used only in bulkhead mounting housings


panel cut-out for bulkhead mounting housings in mm




type	A	B
JCVI 10	65	83

dimensions in mm

JCVI L

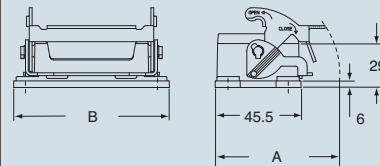


JCVI LP

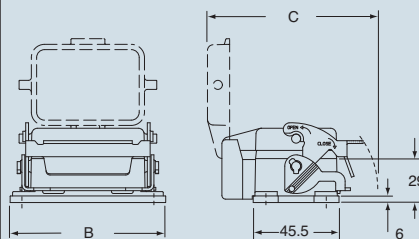

type	A	B	C
JCVI 10 L	70	95.5	-
JCVI 10 LP	-	95.5	94

dimensions in mm

JCVI

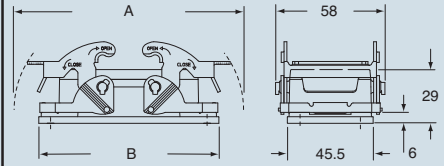

type	A	B
JCVI 10	122	95.5

NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.



dimensions shown are not binding and may be changed without notice

JEI - size 57.27



inserts:		page
CDD	42 poles + ⊕	61
CQE	18 poles + ⊕	81
CSH	10 poles + ⊕	89
CCE	10 poles + ⊕	96
CNE, CSE, JCNE, JCSE	10 poles + ⊕	97 and 107
CSS	10 poles + ⊕	119
CMSE	3+2 (aux) poles + ⊕	135
CMCE	3+2 (aux) poles + ⊕	134
CX	8/24 poles + ⊕	135
MIXO	3 modules	156+195

insert centre distance:
57 x 27 mm

surface mounting housings with single lever with galvanised steel lever



lever in galvanised steel

bulkhead mounting housings with 2 levers and galvanised steel lever




lever in galvanised steel

description	part no.		part no.		part no.		part no.	
	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M
with lever/s, size "57.27"	JCVP 10 L	16	JMVP 10 L20	20				
with levers, size "57.27"					JCVP 10	16	JMVP 10.20	20

dimensions in mm


JCVP L - JMVP L

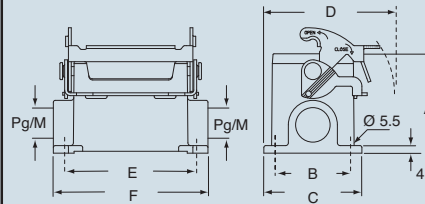

type	A	B	C	D	E	F
JCVP - JMVP	57	40	52	73	82	93.5

dimensions in mm

JCVP - JMVP

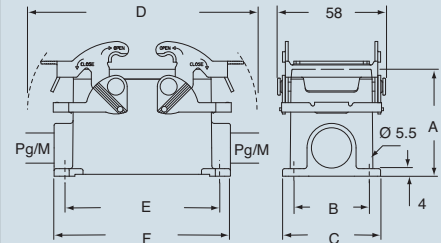

type	A	B	C	D	E	F
JCVP - JMVP	57	40	52	122	82	93.5

JEI - size 57.27



dimensions shown are not binding and may be changed without notice

inserts:		page
CD	40 poles + ⊕	49
CT, CTS (10A)	40 poles + ⊕	56
CDD	72 poles + ⊕	62
CQE	32 poles + ⊕	82
CSH	16 poles + ⊕	90
CCE	16 poles + ⊕	98
CNE, CSE, JCNE, JCSE	16 poles + ⊕	99 and 108
CSS	16 poles + ⊕	120
CT, CTE, CTSE (16A) *)	16 poles + ⊕	128 and 132
CMSE	6+2 (aux) poles + ⊕	137
CMCE	6+2 (aux) poles + ⊕	136
CP	6 poles + ⊕	149
CX	6/36 and 12/2 poles + ⊕	152÷153
CX	4/0 and 4/2 poles + ⊕	154
MIXO	4 modules	156÷195

insert centre distance: 77.5 x 27 mm

bulkhead mounting housings with single lever with galvanised steel lever



lever in galvanized steel


bulkhead mounting housings with 2 levers and galvanised steel lever



lever in galvanized steel

description	part no.	part no.
with lever, size "77.27"	JCVI 16 L	
with lever and plastic cover, size "77.27"	JCVI 16 LP	
with levers, size "77.27"		JCVI 16

*) can be used only in bulkhead mounting housings
panel cut-out for bulkhead mounting housings in mm




type	A	B
JCVI 16	86	103


NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

dimensions in mm

JCVI L

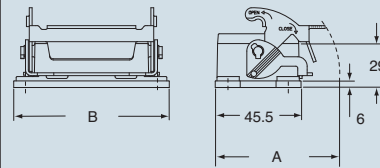


JCVI LP

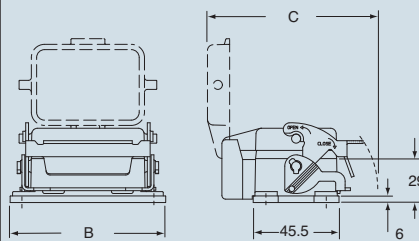

type	A	B	C
JCVI 16 L	70	115.5	-
JCVI 16 LP	-	115.5	94

dimensions in mm

JCVI

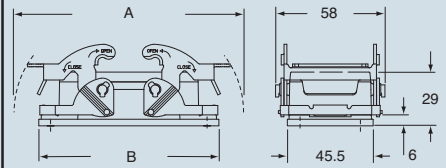

type	A	B
JCVI 16	142.5	115.5



dimensions shown are not binding and may be changed without notice

JEI - size 77.27

inserts:		page
CD	40 poles + ⊕	49
CDD	72 poles + ⊕	62
CQE	32 poles + ⊕	82
CSH	16 poles + ⊕	90
CCE	16 poles + ⊕	98
CNE, CSE, JCNE, JCSE	16 poles + ⊕	99 and 108
CSS	16 poles + ⊕	120
CMSE	6+2 (aux) poles + ⊕	1137
CMCE	6+2 (aux) poles + ⊕	136
CP	6 poles + ⊕	149
CX	6/36 and 12/2 poles + ⊕	152÷153
CX	4/0 and 4/2 poles + ⊕	154
MIXO	4 modules	156÷195

insert centre distance: 77.5 x 27 mm

surface mounting housings with single lever with galvanised steel lever



lever in galvanized steel

surface mounting housing with 2 levers and galvanised steel lever




lever in galvanized steel

description	part no.		part no.		part no.		part no.	
	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M
with lever, size "77.27"	JCVP 16 L	21	JMVP 16 L25	25				
with levers, size "77.27"					JCVP 16	21	JMVP 16.25	25

dimensions in mm


JCVP L - JMVP L

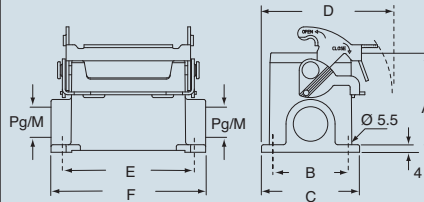

type	A	B	C	D	E	F
JCVP L - JMVP L	63	45	57	75.5	105	117

dimensions in mm

JCVP - JMVP

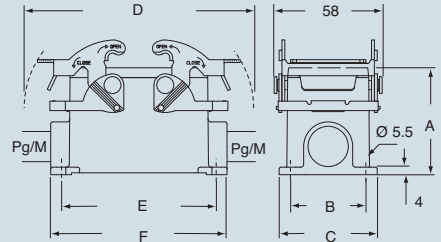

type	A	B	C	D	E	F
JCVP - JMVP	63	45	57	142.5	105	117

JEI - size 77.27



dimensions shown are not binding and may be changed without notice