
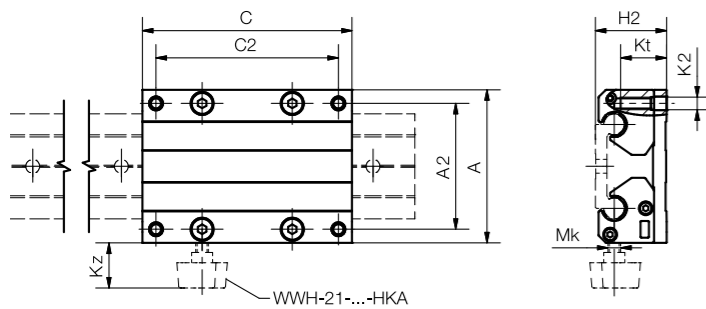
 Order key

Type	Dimensions
------	------------

WWH-21-10-40-10

drylin® W	Hybrid carriage	Double roller bearing	Installation size	Carriage length [mm]
-----------	-----------------	-----------------------	-------------------	----------------------

 Optional with manual clamp, suffix "-HKA"




Technical data and dimensions [mm]

Part No.	Weight [kg]	A Width	C Length	A2	C2	K2	Kt	H2	Static load capacity	
									Coy [N]	
WWH-21-10-40-10	0.59	73	100	60	87	M6	21	34	1,400	
WWH-21-10-40-15	0.64	73	150	60	137	M6	21	34	1,400	
WWH-21-10-40-20	0.70	73	200	60	187	M6	21	34	1,400	
WWH-21-10-80-10	0.64	107	100	94	87	M6	21	34	1,400	
WWH-21-10-80-15	0.72	107	150	94	137	M6	21	34	1,400	
WWH-21-10-80-20	0.80	107	200	94	187	M6	21	34	1,400	
WWH-21-10-120-10	0.71	153	100	140	87	M6	21	34	1,400	
WWH-21-10-120-15	0.84	153	150	140	137	M6	21	34	1,400	
WWH-21-10-120-20	0.96	153	200	140	187	M6	21	34	1,400	
WWH-21-16-60-10	1.31	104	100	86	82	M8	29	49	2,400	
WWH-21-16-60-15	1.44	104	150	86	132	M8	29	49	2,400	
WWH-21-16-60-20	1.57	104	200	86	182	M8	29	49	2,400	
WWH-21-20-80-15	1.72	134	150	116	132	M8	24	57	3,360	
WWH-21-20-80-20	1.82	134	200	116	182	M8	24	57	3,360	
WWH-21-20-80-25	2.02	134	250	116	232	M8	24	57	3,360	

Can be combined with:




 Order key

Type	Dimensions
------	------------

WWH-10-40-10

drylin® W	Hybrid carriage	Installation size	Carriage length [mm]
-----------	-----------------	-------------------	----------------------

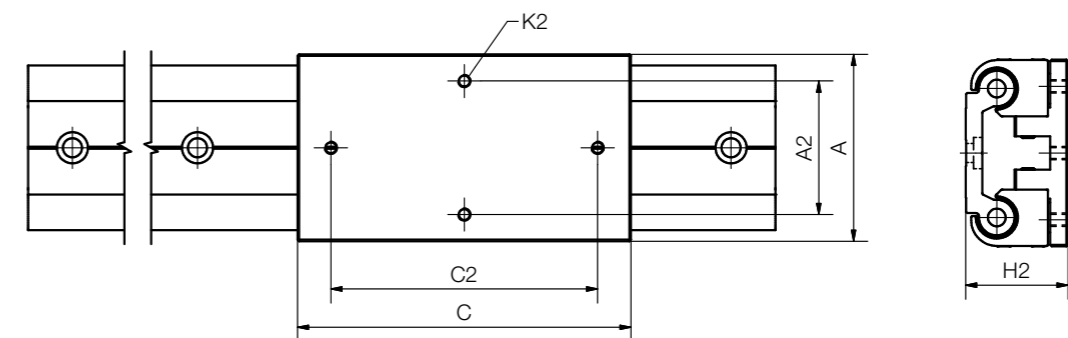

Technical data and dimensions [mm]

Part No.	Weight [kg]	A	A2	C	C2	K2	H2	Stat. load capacity				
								Coy [N]	Coz [N]	Mox [Nm]	Moy [Nm]	Moz [Nm]
WWH-10-40-10	0.35	58	40	100	80	M5	34	1,000	1,000	20	16	32
WWH-16-60-15	0.96	84	60	150	120	M6	46	1,600	1,600	45	38	77
WWH-20-80-25	1.78	114	90	250	220	M6	55	2,200	2,200	90	435	435

Can be combined with:

