


Made from iglidur® L100



Order key

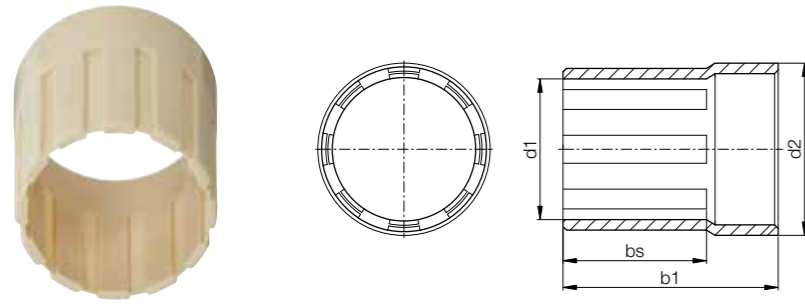

Type	Size
------	------

**W L M-0608-10**

igidur® L100	L1 series	Metric	Inner Ø d1	Outer Ø d2	Length
--------------	-----------	--------	------------	------------	--------

- Extreme wear resistance
- Low coefficient of friction



<sup>80)</sup> Measured with plug gauge

Please note: Installation instructions ► Page 1079

Material properties ► Page 1654



Min. -40°C

Max. +100°C


### Dimensions [mm]

d1	d1 tolerance <sup>80)</sup>	d2	b1	bs	Part No.
6	+0.000 +0.040	8	10	6	<b>WLM-0608-10</b>
8	+0.000 +0.050	10	12	8	<b>WLM-0810-12</b>
10	+0.000 +0.050	12	14.5	10	<b>WLM-1012-14</b>
10	+0.000 +0.050	12	16	10	<b>WLM-1012-16</b>
12	+0.000 +0.050	14	16	10	<b>WLM-1214-16</b>
12	+0.000 +0.050	14	25	15	<b>WLM-1214-25</b>
16	+0.000 +0.050	18	18	10	<b>WLM-1618-18</b>
16	+0.000 +0.050	18	26	16	<b>WLM-1618-26</b>
20	+0.000 +0.060	23	22.5	12.5	<b>WLM-2023-22</b>
20	+0.000 +0.060	23	30	20	<b>WLM-2023-30</b>
22	+0.000 +0.060	25	30	20	<b>WLM-2225-30</b>
25	+0.000 +0.060	28	29	19	<b>WLM-2528-29</b>
25	+0.000 +0.060	28	35	25	<b>WLM-2528-35</b>
30	+0.000 +0.060	34	34	24	<b>WLM-3034-34</b>
30	+0.000 +0.060	34	40	30	<b>WLM-3034-40</b>
40	+0.000 +0.060	44	40	30	<b>WLM-4044-40</b>
40	+0.000 +0.060	44	50	40	<b>WLM-4044-50</b>
50	+0.000 +0.070	55	50	40	<b>WLM-5055-50</b>
50	+0.000 +0.070	55	60	50	<b>WLM-5055-60</b>

Made from iglidur® L100



Order key

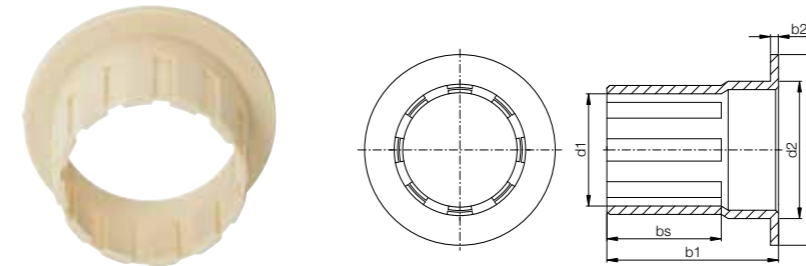

Type	Size
------	------

**W L F M-1214-15**

igidur® L100	L1 series	With flange	Metric	Inner Ø d1	Outer Ø d2	Length
--------------	-----------	-------------	--------	------------	------------	--------

- Extreme wear resistance
- Low coefficient of friction



<sup>80)</sup> Measured with plug gauge

Please note: Installation instructions ► Page 1079

Material properties ► Page 1654



Min. -40°C

Max. +100°C

### Dimensions [mm]

d1	d1 tolerance <sup>80)</sup>	d2	d3	b1	b2	bs	Part No.
12	+0.000 +0.050	14	20	15.0	1.0	9	<b>WLFM-1214-15</b>
16	+0.000 +0.050	18	24	16.0	1.0	10	<b>WLFM-1618-16</b>
20	+0.000 +0.060	23	30	16.5	1.5	10	<b>WLFM-2023-16</b>
25	+0.000 +0.060	28	35	21.5	1.5	11	<b>WLFM-2528-21</b>
30	+0.000 +0.060	34	42	27.0	2.0	15	<b>WLFM-3034-27</b>
40	+0.000 +0.060	44	52	32.0	2.0	20	<b>WLFM-4044-32</b>
50	+0.000 +0.070	55	63	37.5	2.5	25	<b>WLFM-5055-37</b>