


## Extension of the drylin® W modular system



With four pillow blocks and the mounting plate, a linear carriage can be installed in less than a minute. Mounting plates are available in 3 lengths in each installation size and width.

- Robust corrosion-resistant anodised aluminium
- A variety of combinations of liners/bearings/slide plates are possible, also with manual clamp
- Required combination bearing and mounting plate also available pre-assembled

**i** Modular system:  
Can be combined with the complete drylin® linear bearing product range. 4 screws included in delivery.

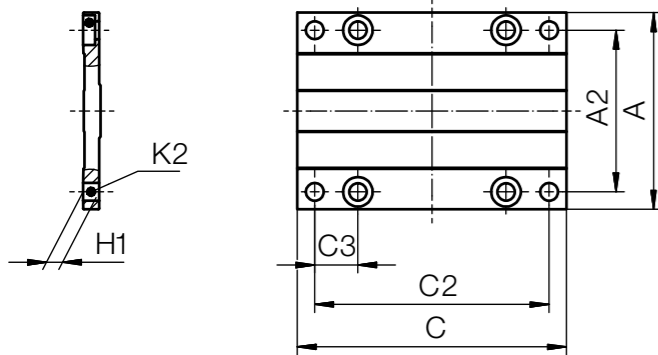

### Technical data and dimensions [mm]

Part No.		C	A	H1	A2	K2	Mounting screws included
WWY-06-30-06-AL	New	60	54	4.0	45	M4	M4
WWY-06-30-08-AL	New	80	54	4.0	45	M4	M4
WWY-06-30-10-AL	New	100	54	4.0	45	M4	M4
WWY-06-60-06-AL	New	60	85	4.0	76	M4	M4
WWY-06-60-08-AL	New	80	85	4.0	76	M4	M4
WWY-06-60-10-AL	New	100	85	4.0	76	M4	M4
WWY-10-30-08-AL	New	80	63	6.5	50	M6	M6
WWY-10-30-10-AL	New	100	63	6.5	50	M6	M6
WWY-10-30-15-AL	New	150	63	6.5	50	M6	M6
WWY-10-40-10-AL	New	100	73	6.5	60	M6	M6
WWY-10-40-15-AL	New	150	73	6.5	60	M6	M6
WWY-10-40-20-AL	New	200	73	6.5	60	M6	M6
WWY-10-80-10-AL	New	100	107	6.5	94	M6	M6
WWY-10-80-15-AL	New	150	107	6.5	94	M6	M6
WWY-10-80-20-AL	New	200	107	6.5	94	M6	M6
WWY-10-120-10-AL	New	100	153	6.5	140	M6	M6
WWY-10-120-15-AL	New	150	153	6.5	140	M6	M6
WWY-10-120-20-AL	New	200	153	6.5	140	M6	M6
WWY-16-60-10-AL	New	100	104	8.5	86	M8	M8
WWY-16-60-15-AL	New	150	104	8.5	86	M8	M8
WWY-16-60-20-AL	New	200	104	8.5	86	M8	M8
WWY-20-80-15-AL	New	150	134	8.5	116	M8	M8
WWY-20-80-20-AL	New	200	134	8.5	116	M8	M8
WWY-20-80-25-AL	New	250	134	8.5	116	M8	M8
WWY-25-120-15-AL	New	150	195	10.0	173	M10	M10
WWY-25-120-20-AL	New	200	195	10.0	173	M10	M10
WWY-25-120-25-AL	New	250	195	10.0	173	M10	M10

Suitable for rails ► Page 986, 987, 988, 989, 992, 993

Suitable for bearings ► Page 976, 980, 982, 983, 984

1026 Online tools and more information ► [www.igus.eu/drylinW](http://www.igus.eu/drylinW)



## drylin® linear technology – drylin® N low-profile linear guides

Low profile and lightweight

Lubrication-free **dry-tech®** sliding elements

Anodised aluminium rail

High speed and acceleration possible

Quiet operation

