


TSS

The **TSS** is the latest addition to the TST grommet range. What makes the **TSS** different from existing products on the market are the built-in features that you do not find in this otherwise relatively simple product.

TSS handles an exceptionally large cable span. It is the only "**simple**" grommet manufactured in a rubber like material, and the only TPE-based end plug.

With the "**push out**" membrane you always have a round opening and are guaranteed to have IP67. The TSS is equipped with a sock that closes tight around the cable and allows for it to be moved around like a "**joy stick**" in the opening without endangering the IP classification. So it works extremely well with cables passing through at an angle. The design makes sure that the grommet stays in place, even when large cables are installed.

These are some of the features that creates a lot of value added in the **TSS**, and makes it a unique product.

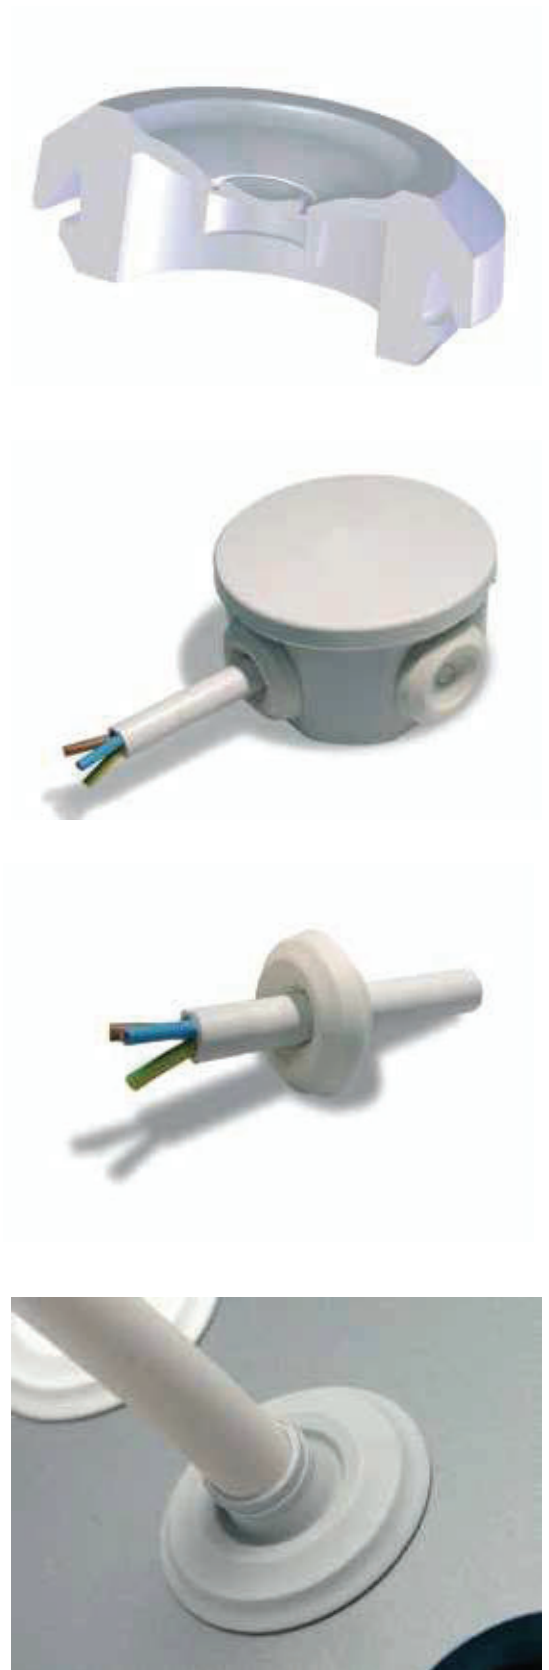

TSS

Product features TSS

End plug/grommet for all applications

Self adjusting to cable diameter

Ergonomic installation

Significant time saving

Handles extremely large cable span 5 - 24mm

IP67 = waterproof

Suits material thickness 0.5 - 4.5mm

Secure installation in opening

Temperature range -50°C to +25°C

Easy and fast installation



"Pushout" membrane

"Joy-stick" effect thanks to built in sock


Not for temporary use




Push the grommet into the hole.



Pierce the grommet with the cable.

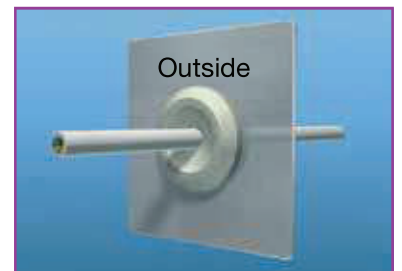

TSS

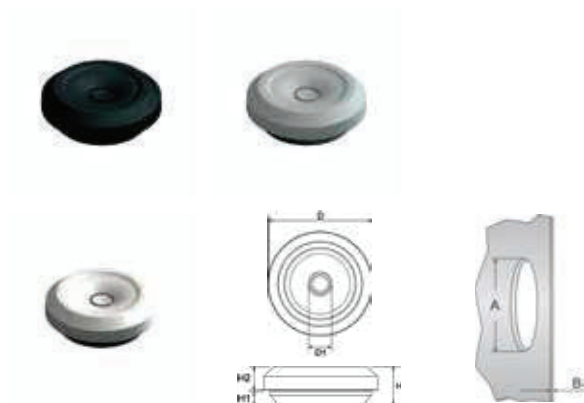

Material	TPE - Thermoplastic Elastomer Halogen Free UL approved material
Mode of protection	IP67
Temperature range	-50° to + 125°C ⁽¹⁾
Test standard	EN60529: 1991+A1 EMKO-TUI (03-SEC) F1001/84
Semko report	M16 - 708555-1 M20 - 708555-2 M25 - 708555-3 M32 - 708555-4
Quick and simple assembly without the use of tools Handles exceptionally large cable span An end-plug for all applications	

(1) Unstressed material

Part No	Size	For pipe Ø mm	A mm	B mm	D* mm	D1 mm	H mm	H1 mm	H2* mm	Pcs pack
Light Grey - RAL 7035										
TST1475711	M16	5 - 10	16.5	0.5 - 3	23.5	4	11	4	6.75	50
TST1475712	M20	6 - 13	20.5	0.5 - 3	27.5	5	11	4	6.75	50
TST1475713	M25	8 - 17	25.5	0.5 - 3.5	32.5	7	11	4	6.75	50
TST1475714	M32	12 - 24	32.5	0.5 - 4.5	39.5	11	11	4	6.75	25
Black - RAL 9005										
TST1475716	M16	5 - 10	16.5	0.5 - 3	23.5	4	11	4	6.75	50
TST1475717	M20	6 - 13	20.5	0.5 - 3	27.5	5	11	4	6.75	50
TST1475718	M25	8 - 17	25.5	0.5 - 3.5	32.5	7	11	4	6.75	50
TST1475719	M32	12 - 24	32.5	0.5 - 4.5	39.5	11	11	4	6.75	25
White - RAL 9010										
TST1475721	M16	5 - 10	16.5	0.5 - 3	23.5	4	11	4	6.75	50
TST1475722	M20	6 - 13	20.5	0.5 - 3	27.5	5	11	4	6.75	50
TST1475723	M25	8 - 17	25.5	0.5 - 3.5	32.5	7	11	4	6.75	50
TST1475724	M32	12 - 24	32.5	0.5 - 4.5	39.5	11	11	4	6.75	25