


Data sheet

chainflex® CFROBOT3

Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant

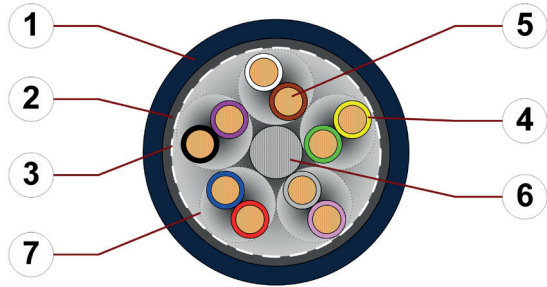

1. Outer jacket: Pressure extruded PUR mixture
2. Overall shield: Extremely torsion-resistant wrapping made of tinned copper wires
3. Banding: Plastic fleece
4. Core insulation: Mechanically high-quality TPE mixture
5. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires
6. Strain relief: Tensile stress-resistant centre element
7. Core structure: Paare mit optimierter Schlaglänge und -richtung



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image
For detailed overview please see design table

Cable structure

Conductor	Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228).
Core insulation	Mechanically high-quality TPE mixture.
Core structure	Cores twisted in pairs with a short pitch length, core pairs then wound with short pitch lengths.
Core identification	Colour code in accordance with DIN 47100.
Overall shield	Extremely torsion-resistant tinned wound copper shield. Coverage optical approx. 85 %
Outer jacket	Low-adhesion, halogen-free, highly abrasion resistant PUR mixture, adapted to suit the requirements in e-chains® (following DIN EN 50363-10-2) Colour: Steel-blue (similar to RAL 5011) Printing: white

* **Length printing:** Not calibrated. Only intended as an orientation aid.
 ⓐ / ⓑ Cable identification according to Part No. (see technical table).
 Example: chainflex **CFROBOT3.05.05.02 (5x(2x0.5))C**

Example image

Data sheet

chainflex® CFROBOT3

Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant



Example image

Dynamic information

Bend radius	e-chain® twisted	min. 10 x d
	flexible	min. 8 x d
	fixed	min. 5 x d
Temperature	e-chain® twisted	-25 °C up to +80 °C
	flexible	-40 °C up to +80 °C (following DIN EN 60811-504)
	fixed	-50 °C up to +80 °C (following DIN EN 50305)
v max.	twisted	180 °/s
a max.	twisted	60 °/s ²
Travel distance	Robots and 3D movements, Class 1	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Guaranteed service life according to guarantee conditions

Cycles	5 million	7.5 million	10 million
Temperature, from/to [°C]	Torsion max. [°/m]	Torsion max. [°/m]	Torsion max. [°/m]
-25/-15	±150	±90	±30
-15/+70	±180	±120	±60
+70/+80	±150	±90	±30

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.

Electrical information

Nominal voltage	300/500 V (following DIN VDE 0298-3) 300 V (following UL)
Testing voltage	2000 V (following DIN EN 50395)

Data sheet


chainflex® CFROBOT3

Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant



Example image

Properties and approvals

UV resistance	High
Oil resistance	Oil-resistant (following DIN EN 50363-10-2), Class 3
Flame retardant	According to IEC 60332-1-2, FT1, VW-1
Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
 UL verified	Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
UL/CSA AWM	See table UL/CSA AWM for details
NFPA	Following NFPA 79-2018, chapter 12.9
EAC	Certificate No. RU C-DE.ME77.B.00300/19 (TR ZU)
REACH	In accordance with regulation (EC) No. 1907/2006 (REACH)
Lead-free	Following 2011/65/EC (RoHS-II/RoHS-III)
Cleanroom	According to ISO Class 1. The outer jacket material of this series complies with CF77. UL.05.12.D - tested by IPA according to standard DIN EN ISO 14644-1
CE	Following 2014/35/EU



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Properties and approvals

UL/CSA AWM Details

Conductor nominal cross section [mm ²]	Number of cores	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
0.25	8-16	10497	20911	300	80
0.5	10	10497	20911	300	80

Data sheet

chainflex® CFROBOT3


Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant



Example image


Typical lab test setup for this cable series

Test bend radius R	approx. 100 - 125 mm
Test travel S/S ₂	approx. 1 - 12 m
Test duration	minimum 1.5 - 3 million double strokes
Test speed	approx. 0.5 m/s
Test acceleration	approx. 1.5 m/s ²

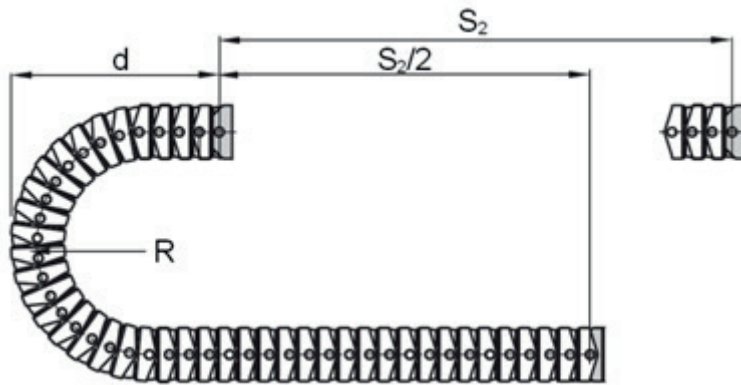

Typical lab test setup (torsion) for this cable series

Torsion range T	±180°/m
Length 3D e-chain®	1 m
Test duration (torsion)	minimum 3 - 5 million cycles
Test speed (torsion)	approx. 80 - 120 °/s
Test acceleration (torsion)	approx. 40°/s ²

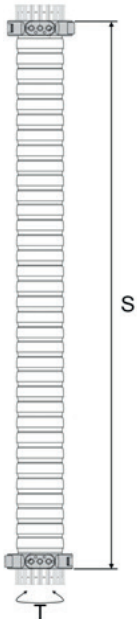

igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year

Data sheet

chainflex® CFROBOT3

Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant



Example image

Typical application areas

- For heaviest duty applications with torsion movements, Class 6
- Especially for robots and 3D movements, Class 1
- Almost unlimited resistance to oil, Class 3
- Torsion $\pm 180^\circ$, with 1m cable length, Class 3
- Indoor and outdoor applications, UV-resistant
- Robots, Handling, spindle drives



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Technical tables:

Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm ²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CFROBOT3.02.03.02	(3x(2x0.25))C	9.0	33	84
CFROBOT3.02.04.02	(4x(2x0.25))C	10.5	38	103
CFROBOT3.02.06.02	(6x(2x0.25))C	11.5	52	127
CFROBOT3.02.08.02	(8x(2x0.25))C	13.5	66	170
CFROBOT3.05.05.02	(5x(2x0.5))C	12.5	80	170

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.

G = with green-yellow earth core x = without earth core

Electrical information

Conductor nominal cross section [mm ²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Maximum current rating at 30 °C [A]
0.25	78.0	5
0.5	39.0	10

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.

Data sheet

chainflex® CFROBOT3

Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant




Example image

Design table

Part No.	Number of cores	Core design
CFROBOT3.XX.03.02	3x2	
CFROBOT3.XX.04.02	4x2	
CFROBOT3.XX.05.02	5x2	
CFROBOT3.XX.06.02	6x2	
CFROBOT3.XX.08.02	8x2	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Data sheet

chainflex® CFROBOT3

Data cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Shielded ● Oil-resistant and coolant-resistant ● Flame retardant ● Notch-resistant ● Hydrolysis and microbe-resistant

Colour code in accordance with DIN 47100.

Conductor no.	Colours according to DIN ISO 47100	Conductor no.	Colours according to DIN ISO 47100	Conductor no.	Colours according to DIN ISO 47100
1	white	22	brown-blue	43	blue-black
2	brown	23	white-red	44	red-black
3	green	24	brown-red	45	white-brown-black
4	yellow	25	white-black	46	yellow-green-black
5	grey	26	brown-black	47	grey-pink-black
6	pink	27	grey-green	48	red-blue-black
7	blue	28	yellow-grey	49	white-green-black
8	red	29	pink-green	50	brown-green-black
9	black	30	yellow-pink	51	white-yellow-black
10	violet	31	green-blue	52	yellow-brown-black
11	grey-pink	32	yellow-blue	53	white-grey-black
12	red-blue	33	green-red	54	grey-brown-black
13	white-green	34	yellow-red	55	white-pink-black
14	brown-green	35	green-black	56	pink-brown-black
15	white-yellow	36	yellow-black	57	white-blue-black
16	yellow-brown	37	grey-blue	58	brown-blue-black
17	white-grey	38	pink-blue	59	white-red-black
18	grey-brown	39	grey-red	60	brown-red-black
19	white-pink	40	pink-red	61	black-white
20	pink-brown	41	grey-black		
21	white-blue	42	pink-black		

igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

