


Data sheet

chainflex® CFROBOT5

Fibre Optic Cable (Class 6.1.4.3) ● For torsion applications ● TPE outer jacket ● Oil and bio-oil-resistant ● UV-resistant ● Low-temperature-flexible ● Hydrolysis and microbe-resistant ● PVC and halogen-free

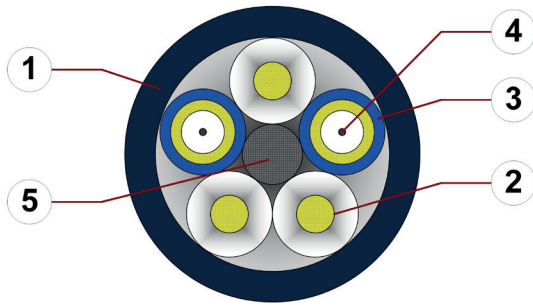

1. Outer jacket: Pressure extruded, halogen-free TPE mixture
2. Filling: Aramid damper for high tensile stresses
3. Subcable jacket: LSZH („Low smoke & zero halogen“) Material
4. Fibre: Glass optical fibre (GOF)
5. Bend protection: Glasfaserverstärkter Kunststoffstab



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year

Example image
For detailed overview please see design table

Cable structure

Fibre Optic Cable	50/125 µm, 62.5/125 µm bending-resistant solid glass fibre optic cores, with aramid strain relief elements.
Core structure	FOC cores wound with high-tensile aramid dampers around a GRP central element.
Core identification	► Product range table
Outer jacket	Low-adhesion, extremely abrasion-resistant and highly flexible TPE mixture, adapted to suit the requirements in e-chains®. Colour: Jet black (similar to RAL 9005) Printing: white

* **Length printing:** Not calibrated. Only intended as an orientation aid.
① / ② Cable identification according to Part No. (see technical table).
Example: chainflex **CFROBOT5.501 2x50/125**

Example image

Data sheet


chainflex® CFROBOT5

Fibre Optic Cable (Class 6.1.4.3) ● For torsion applications ● TPE outer jacket ● Oil and bio-oil-resistant ● UV-resistant ● Low-temperature-flexible ● Hydrolysis and microbe-resistant ● PVC and halogen-free



Dynamic information

Bend radius	e-chain® twisted	min. 10 x d
	flexible	min. 8 x d
	fixed	min. 5 x d
Temperature	e-chain® twisted	-35 °C up to +80 °C
	flexible	-50 °C up to +80 °C (following DIN EN 60811-504)
	fixed	-55 °C up to +80 °C (following DIN EN 50305)
v max.	twisted	180 °/s
a max.	twisted	60 °/s ²
Travel distance	Robots and 3D movements, Class 1	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Guaranteed service life according to guarantee conditions

Cycles	5 million	7.5 million	10 million
Temperature, from/to [°C]	Torsion max. [°/m]	Torsion max. [°/m]	Torsion max. [°/m]
-35/-25	±150	±90	±30
-25/+70	±180	±120	±60
+70/+80	±150	±90	±30

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.

Example image


igus® chainflex® CFROBOT 5

Data sheet

chainflex® CFROBOT5

Fibre Optic Cable (Class 6.1.4.3) ● For torsion applications ● TPE outer jacket ● Oil and bio-oil-resistant ● UV-resistant ● Low-temperature-flexible ● Hydrolysis and microbe-resistant ● PVC and halogen-free

Properties and approvals

UV resistance	High
Oil resistance	Oil-resistant (following DIN EN 60811-404), bio-oil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4
Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
Halogen-free	Following DIN EN 60754
 UL verified	Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
REACH	In accordance with regulation (EC) No. 1907/2006 (REACH)
Lead-free	Following 2011/65/EC (RoHS-II/RoHS-III)
Cleanroom	According to ISO Class 1. The outer jacket material of this series complies with CF9.15.07 - tested by IPA according to standard DIN EN ISO 14644-1
CE	Following 2014/35/EU

igus 36-month
chainflex cable
guarantee and
service life
calculator based
on 2 billion test
cycles per year



Example image




Data sheet

chainflex® CFROBOT5

Fibre Optic Cable (Class 6.1.4.3) ● For torsion applications ● TPE outer jacket ● Oil and bio-oil-resistant ● UV-resistant ● Low-temperature-flexible ● Hydrolysis and microbe-resistant ● PVC and halogen-free



Typical lab test setup for this cable series

Test bend radius R	approx. 115 mm
Test travel S/S ₂	approx. 1 - 12 m
Test duration	minimum 1.5 - 3 million double strokes
Test speed	approx. 0.5 m/s
Test acceleration	approx. 1.5 m/s ²

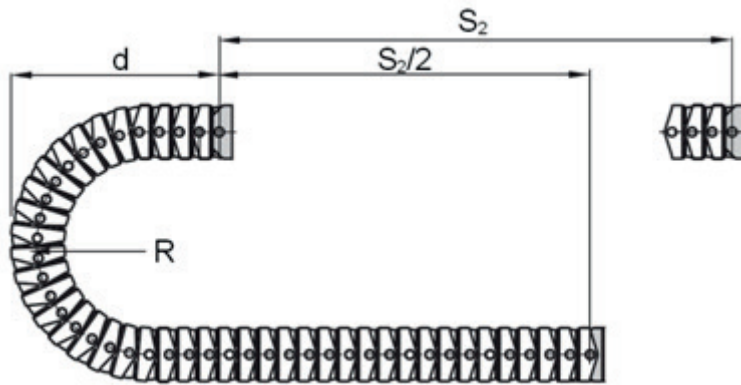


Typical lab test setup (torsion) for this cable series

Torsion range T	±180°/m
Length 3D e-chain®	1 m
Test duration (torsion)	minimum 3 - 5 million cycles
Test speed (torsion)	approx. 80 - 120 °/s
Test acceleration (torsion)	approx. 40°/s ²

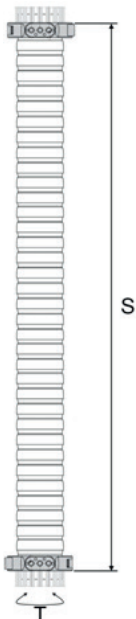

igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year

Example image



Data sheet

chainflex® CFROBOT5

Fibre Optic Cable (Class 6.1.4.3) ● For torsion applications ● TPE outer jacket ● Oil and bio-oil-resistant ● UV-resistant ● Low-temperature-flexible ● Hydrolysis and microbe-resistant ● PVC and halogen-free

Typical application areas

- For heaviest duty applications with torsion movements, Class 6
- Especially for robots and 3D movements, Class 1
- Almost unlimited resistance to oil, also with bio-oils, Class 4
- Torsion $\pm 180^\circ$, with 1m cable length, Class 3
- Indoor and outdoor applications, UV-resistant
- Robots, Handling

Technical tables:

Mechanical information

Part No.	Number of fibres Fibre diameter Conductor nominal cross section	Outer diameter (d) max. [mm]	Weight [kg/km]
Multimode (Graded index)			
CFROBOT5.500 ¹⁾	2x62,5/125	8,5	53
CFROBOT5.501 ¹⁾	2x50/125	8,5	53


¹⁾ Phase-out model

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.

Technical tables:

Optical features

Fibre diameter [μm]	Wave length [nm]	Bandwidth [MHz x km] [MHz x km]	Attenuation [dB/km] [dB/km]
62,5/125	850	≥ 200	≤ 3,0
62,5/125	1300	≥ 500	≤ 0,7
50/125	850	≥ 500	≤ 2,5
50/125	1300	≥ 500	≤ 0,7



igus 36-month
chainflex cable
guarantee and
service life
calculator based
on 2 billion test
cycles per year




Example image

Data sheet

chainflex® CFROBOT5


Fibre Optic Cable (Class 6.1.4.3) ● For torsion applications ● TPE outer jacket ● Oil and bio-oil-resistant ● UV-resistant ● Low-temperature-flexible ● Hydrolysis and microbe-resistant ● PVC and halogen-free



Example image


Design table

Fibre diameter: 62,5/125

Part No. (No. of cores)	Core design
CFROBOT5.500 (2x62,5/125)	

Design table

Fibre diameter: 50/125

Part No. (No. of cores)	Core design
CFROBOT5.501 (2x50/125)	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year

