


Bistable version for vacuum G1/2" with quick exhaust

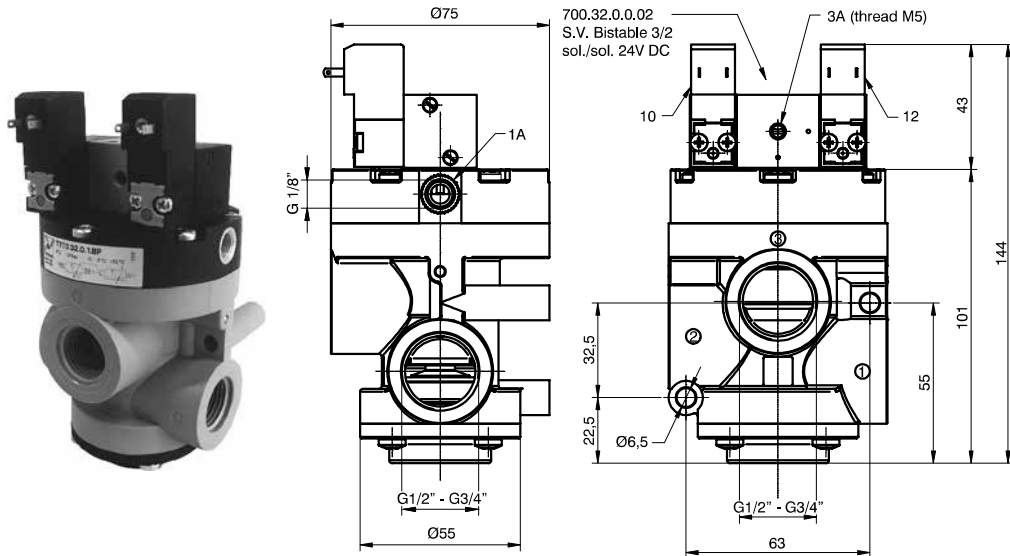

Ordering code


T772/V.S.32.0.1.BP

For vacuum - N.C.

Exhaust: Port 1

Outlet: Port 2

Pump: Port 3




For vacuum - N.O.

Exhaust: Port 3

Outlet: Port 2

Pump: Port 1




Weight 550 gr.

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2,5
Temperature °C	-5 ... +50
Orifice size (mm)	15
Working port size	G 1/2"
Pilot port size	G 1/8"

Bistable version for vacuum G3/4" with quick exhaust

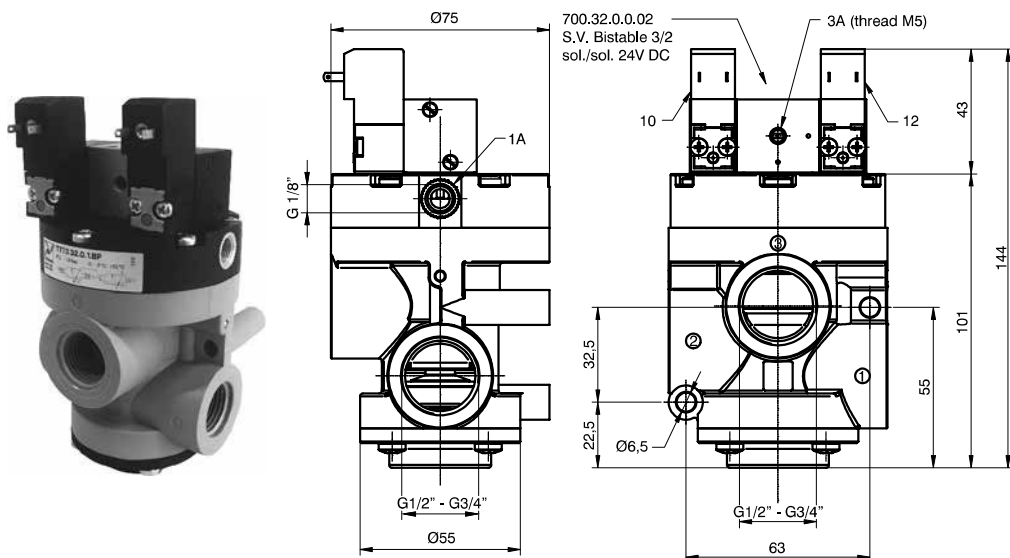

Ordering code


T773/V.S.32.0.1.BP

For vacuum - N.O.

Exhaust: Port 3

Outlet: Port 2

Pump: Port 1




For vacuum - N.C.

Exhaust: Port 1

Outlet: Port 2

Pump: Port 3



Weight 550 gr.

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2,5
Temperature °C	-5 ... +50