



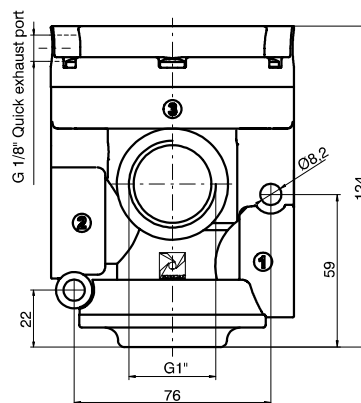

Series T771

Pneumatic-Spring

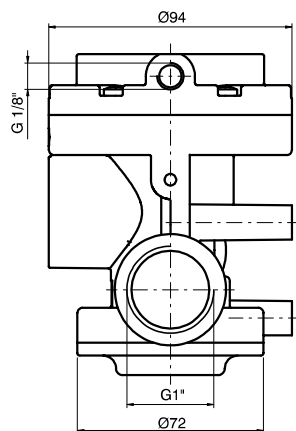


Ordering code

T771/V.32.11.1


For vacuum - N.C.

Exhaust: Port 3
Outlet: Port 2
Pump: Port 1



For vacuum - N.O.

Exhaust: Port 1
Outlet: Port 2
Pump: Port 3





Weight 480 gr.

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2
Temperature °C	-5 ... +50
Orifice size (mm)	25
Working port size	G 1"
Pilot port size	G 1/8"
Response time according to ISO 12238 energised (ms)	N.C. = 55 - N.O. = 19
Response time according to ISO 12238 de-energised (ms)	N.C. = 320 - N.O. = 450

Solenoid-Spring-Self feeding

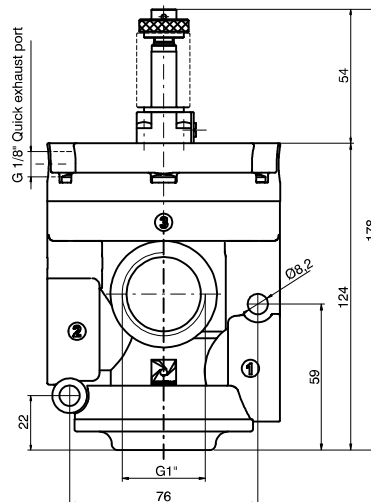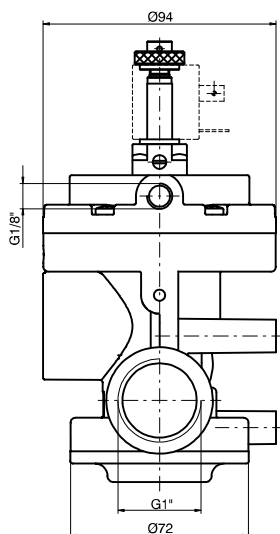

Ordering code


T771/V.32.0.0.MV

FUNCTION

- F** 1AC=Normally Closed
1AA=Normally Open


For vacuum - N.O.

Exhaust: Port 3
Outlet: Port 2
Pump: Port 1



For vacuum - N.C.

Exhaust: Port 1
Outlet: Port 2
Pump: Port 3



Weight 520 gr.

Operational characteristics

Fluid	Vacuum
Temperature °C	-5 ... +50
Orifice size (mm)	25
Working port size	G 1"
Pilot port size	G 1/8"
Response time according to ISO 12238 energised (ms)	1AC = 100 - 1AA = 80