


► Solenoid-Spring-External feeding

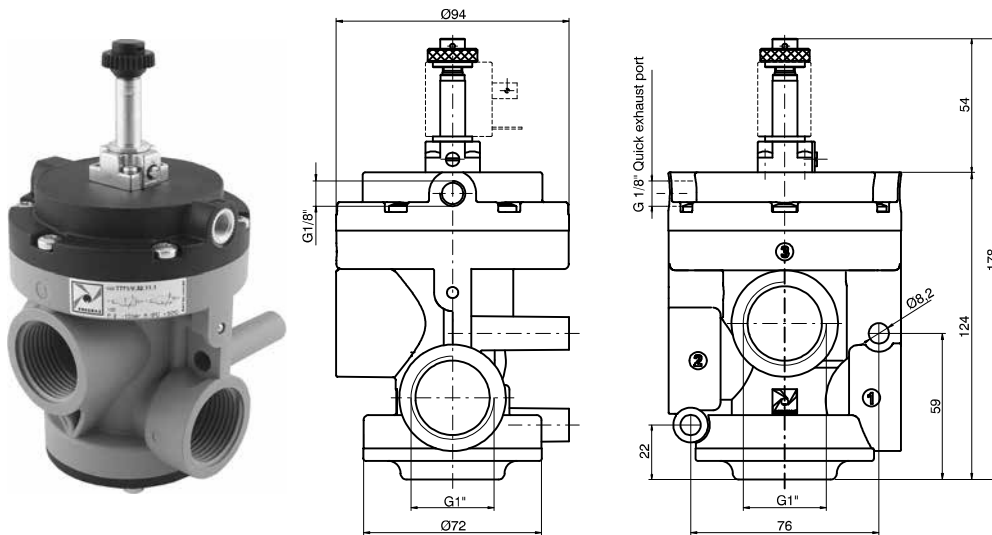

Ordering code


T771/V.32.0.1.MP

For vacuum - N.O.

Exhaust: Port 1

Outlet: Port 2

Pump: Port 3




For vacuum - N.C.

Exhaust: Port 3

Outlet: Port 2

Pump: Port 1




Weight 520 gr.

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2
Temperature °C	-5 ... +50
Orifice size (mm)	25
Working port size	G 1"
Pilot port size	G 1/8"
Response time according to ISO 12238 energised (ms)	N.C. = 50 - N.O. = 19
Response time according to ISO 12238 de-energised (ms)	N.C. = 315 - N.O. = 450

► Solenoid-Spring-External feeding with quick exhaust

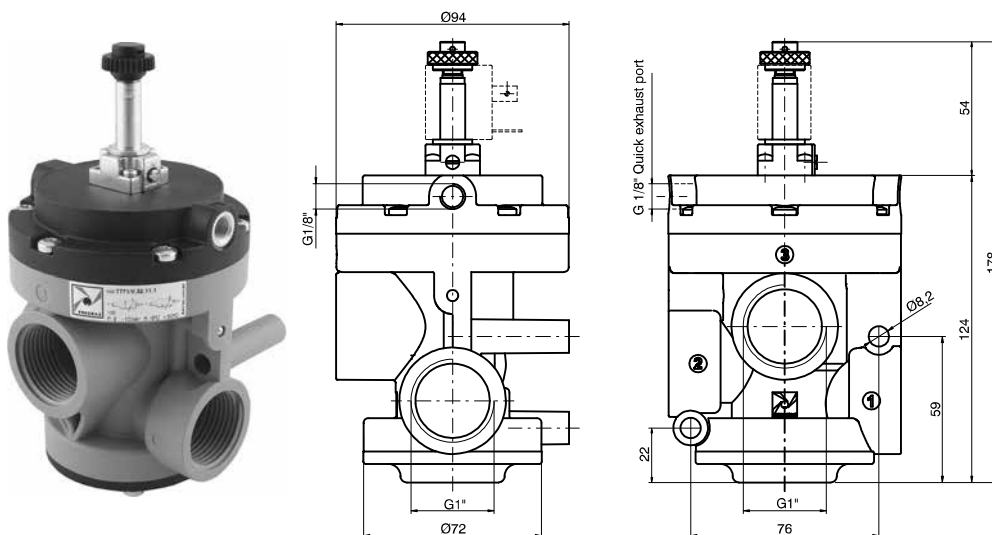

Ordering code


T771/VS.32.0.1.MP

For vacuum - N.O.

Exhaust: Port 3

Outlet: Port 2

Pump: Port 1



For vacuum - N.C.

Exhaust: Port 1

Outlet: Port 2

Pump: Port 3



Weight 520 gr.

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2
Temperature °C	-5 ... +50
Orifice size (mm)	25
Working port size	G 1"