





Bistable version for vacuum G1"

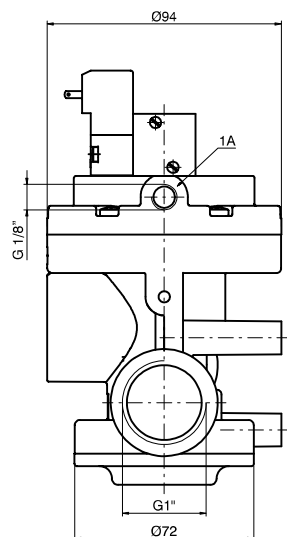

S.V. Bistable 3/2 sol./sol. 24 V DC  
cod. 700.32.0.0.02

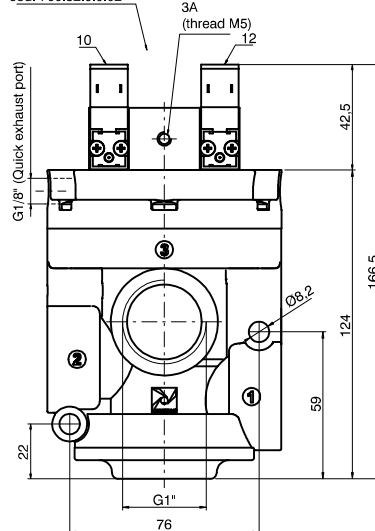


Ordering code

**T771/V.32.0.1.BP**

**For vacuum - N.C.**

Exhaust: Port 1  
Outlet: Port 2  
Pump: Port 3



**For vacuum - N.O.**

Exhaust: Port 3  
Outlet: Port 2  
Pump: Port 1




Weight 680 gr.


Operational characteristics

| Fluid                           | Vacuum     |
|---------------------------------|------------|
| Minimum piloting pressure (bar) | 2,5        |
| Temperature °C                  | -5 ... +50 |
| Orifice size (mm)               | 25         |
| Working port size               | G1"        |
| Pilot port size                 | G1/8"      |

Bistable version for vacuum G1" with exhaust

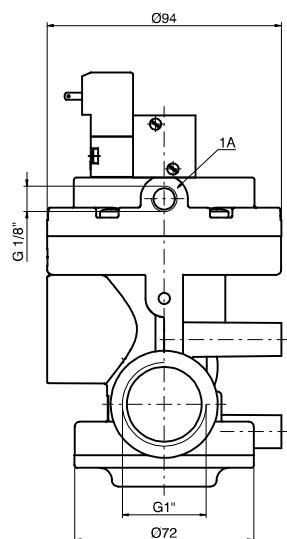

S.V. Bistable 3/2 sol./sol. 24 V DC  
cod. 700.32.0.0.02

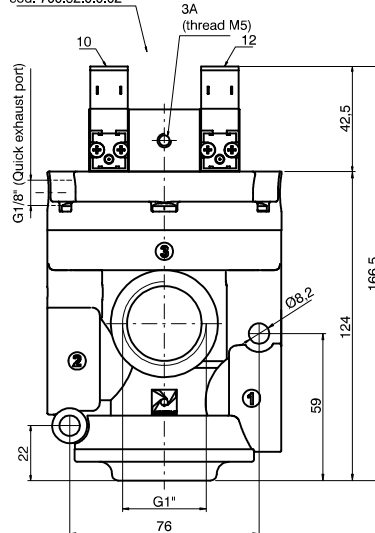


Ordering code

**T771/VS.32.0.1.BP**


**For vacuum - N.O.**

Exhaust: Port 3  
Outlet: Port 2  
Pump: Port 1



**For vacuum - N.C.**

Exhaust: Port 1  
Outlet: Port 2  
Pump: Port 3



Weight 680 gr.

Operational characteristics

| Fluid                           | Vacuum     |
|---------------------------------|------------|
| Minimum piloting pressure (bar) | 2,5        |
| Temperature °C                  | -5 ... +50 |