




► Solenoid valve (for Series 776)

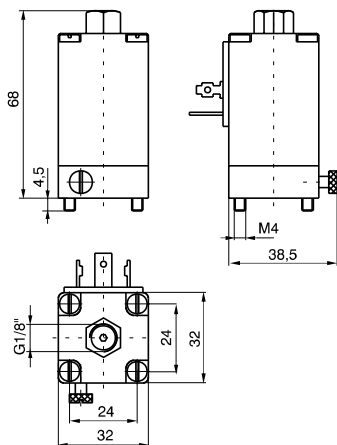


Weight 220 gr.

Versione Standard

Ordering code	Available voltages
S 2	6 D.C. Direct current
S 4	12 D.C. Direct current
S 5	24 D.C. Direct current
S 6	48 D.C. Direct current
S 16	12/50 Alternating current 50 Hz
S 17	24/50 Alternating current 50 Hz
S 19	32/50 Alternating current 50 Hz
S 20	42/50 Alternating current 50 Hz
S 21	48/50 Alternating current 50 Hz
S 22	110/50 Alternating current 50 Hz
S 23	115/50 Alternating current 50 Hz
S 24	230/50 Alternating current 50 Hz
S 36	12/60 Alternating current 60 Hz
S 37	24/60 Alternating current 60 Hz
S 38	48/60 Alternating current 60 Hz
S 39	110/60 Alternating current 60 Hz
S 40	115/60 Alternating current 60 Hz
S 41	230/60 Alternating current 60 Hz
S 56	24/50-60 Alternating current 50/60 Hz
S 57	110/50-60 Alternating current 50/60 Hz
S 58	230/50-60 Alternating current 50/60 Hz

Normally Closed (N.C.)



Versione c US

Ordering code	Available voltages
US 4	12 D.C. Direct current
US 5	24 D.C. Direct current
US 56	24/50-60 Alternating current 50/60 Hz
US 57	110 ... 120/50-60 Alternating current 50/60 Hz
US 58	230/50-60 Alternating current 50/60 Hz