




Series T700

Pneumatic-Spring

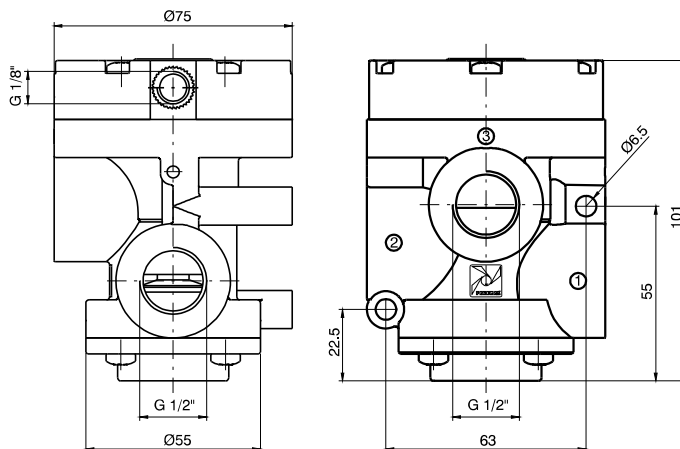


Ordering code

T772/V.32.11.1


For vacuum - N.O.

Exhaust: Port 1
Outlet: Port 2
Pump: Port 3



For vacuum - N.C.

Exhaust: Port 3
Outlet: Port 2
Pump: Port 1




Weight 350 gr.

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2,5
Temperature °C	-5 ... +50
Orifice size (mm)	15
Working port size	G1/2"
Pilot port size	G1/8"
Response time according to ISO 12238 energised (ms)	N.C. = 50 - N.O. = 27
Response time according to ISO 12238 de-energised (ms)	N.C. = 150 - N.O. = 195

Solenoid-Spring-Self feeding

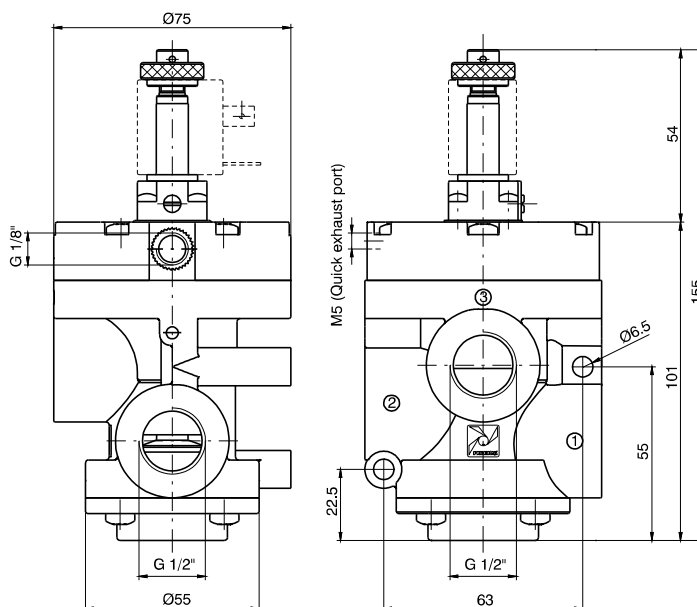

Ordering code


779/V.32.0.M2/V

FUNCTION

F 1AA=Normally Open
1AC=Normally Closed


For vacuum - N.O.

Exhaust: Port 3
Outlet: Port 2
Pump: Port 1



For vacuum - N.C.

Exhaust: Port 1
Outlet: Port 2
Pump: Port 3



Weight 390 gr.

Operational characteristics

Fluid	Vacuum
Temperature °C	-5 ... +50
Orifice size (mm)	15
Working port size	G1/2"
Pilot port size	G1/8"
Response time according to ISO 12238 energised (ms)	1AC = 55 - 1AA = 33