




Pneumatic-Spring

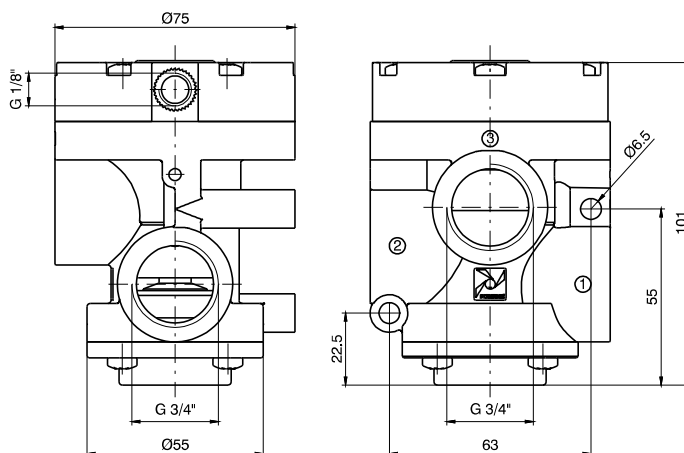

Ordering code


T773/V.32.11.1

For vacuum - N.C.

Exhaust: Port 3

Outlet: Port 2

Pump: Port 1




For vacuum - N.O.

Exhaust: Port 1

Outlet: Port 2

Pump: Port 3




Weight 330 gr.

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2,5
Temperature °C	-5 ... +50
Orifice size (mm)	20
Working port size	G3/4"
Pilot port size	G1/8"
Response time according to ISO 12238 energised (ms)	N.C. = 28 - N.O. = 50
Response time according to ISO 12238 de-energised (ms)	N.C. = 190 - N.O. = 150

Solenoid-Spring-Self feeding

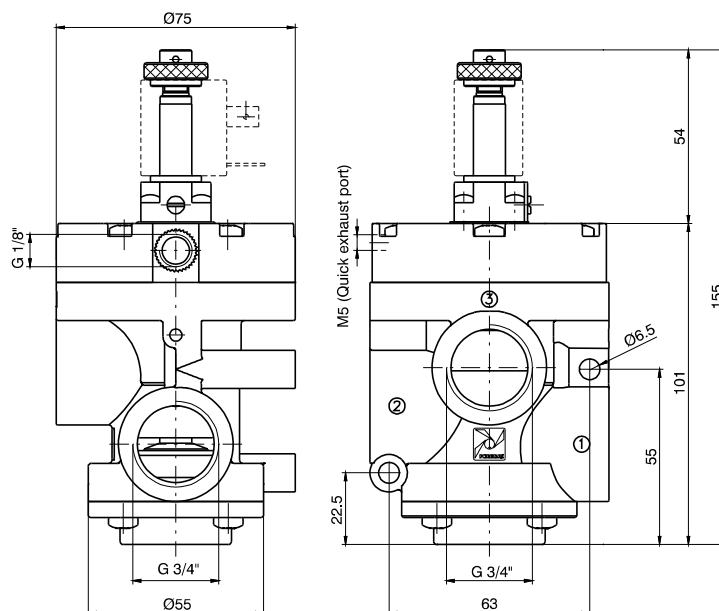

Ordering code

T773/V.32.0.F.MV

FUNCTION


- F** 1AA=Normally Open
1AC=Normally Closed

For vacuum - N.O.

Exhaust: Port 3

Outlet: Port 2

Pump: Port 1




For vacuum - N.C.

Exhaust: Port 1

Outlet: Port 2

Pump: Port 3



Weight 370 gr.

Operational characteristics

Fluid	Vacuum
Temperature °C	-5 ... +50
Orifice size (mm)	20
Working port size	G3/4"