




► Solenoid-Spring-External feeding

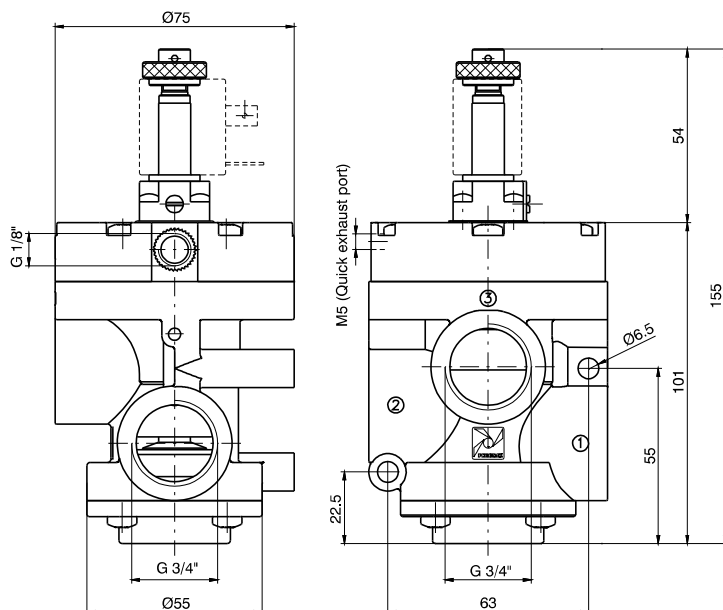

Ordering code


T773/V.32.0.1.MP

For vacuum - N.O.

Exhaust: Port 1

Outlet: Port 2

Pump: Port 3




For vacuum - N.C.

Exhaust: Port 3

Outlet: Port 2

Pump: Port 1




Weight 350 gr.

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2,5
Temperature °C	-5 ... +50
Orifice size (mm)	20
Working port size	G3/4"
Pilot port size	G1/8"
Response time according to ISO 12238 energised (ms)	N.C. = 25 - N.O. = 40
Response time according to ISO 12238 de-energised (ms)	N.C. = 175 - N.O. = 145

► Solenoid-Spring-External feeding with quick exhaust

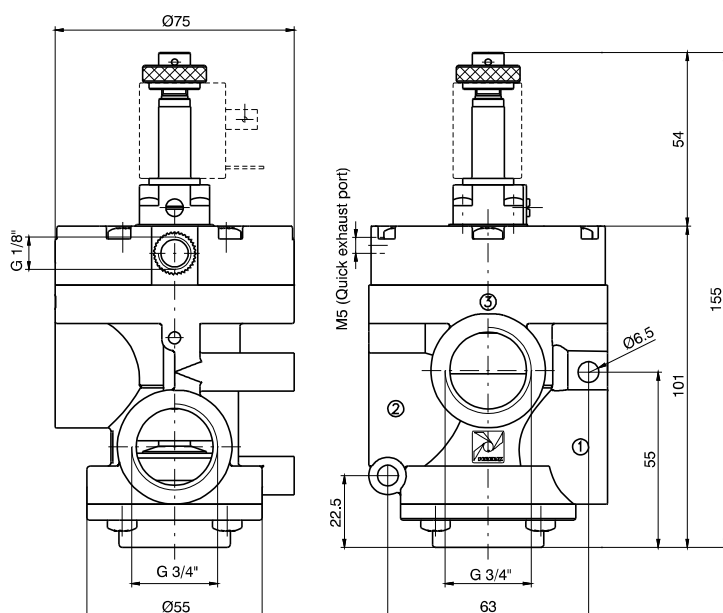

Ordering code


T773/VS.32.0.1.MP

For vacuum - N.O.

Exhaust: Port 3

Outlet: Port 2

Pump: Port 1




For vacuum - N.C.

Exhaust: Port 1

Outlet: Port 2

Pump: Port 3



Weight 390 gr.

Operational characteristics

Fluid	Vacuum
Minimum piloting pressure (bar)	2,5
Temperature °C	-5 ... +50
Orifice size (mm)	20
Working port size	G3/4"