





Multistage vacuum generator G3/8"

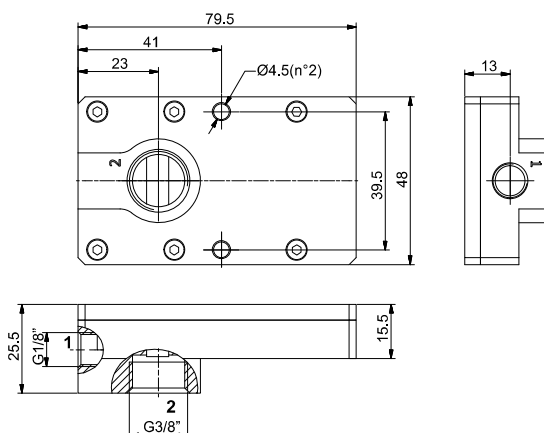

Ordering code






19M38.M.12.SS.00



As a function of the modules (nozzles 2-4-6-8) used, offer exactly the right performance for the most varied of industrial applications. They ensure a low level of noise thanks to the sound-absorbent material inside of them.

Operational characteristics

- Inlet pressure (bar)	2	4	6
- Degree of Vacuum (-kPa)	40	88	86
- Intake flow rate (l/min)	57	95	112
- Air consumption (l/min)	44	75	109



Technical characteristics

Fluid	Unlubricated filtered air
Pressure (bar)	1 ... 8
Temperature (°C)	-10 ... +80
Weight (gr.)	132