

TECHNICAL DATA SHEET

PMAFLEX Multilayer - XR90 - Corrugated Conduit

Very flexible, medium-duty

PMA



Highly flexible conduit with a unique wear indication function. Especially suitable for applications with a pullback system

CE

Applications:

- For dynamically moving conduit systems in robotics and automation industry

Features & Benefits:

- With wear indication function
- High resistance to continuous bending
- No abrupt conduit failure due to high tear propagation resistance
- High abrasion resistance
- High resistance to torsion and elongation
- Suitable for applications with a pullback system
- Long service life

Materials:

- Outer, intermediate and inner layer made from High-grade, specially formulated polyamide 12

Compatible with:

- PMA Automation Products
- PMAFIX Pro, PMAFIX fittings
- PMAGRIP flange
- PMA accessories

Temperature range:

- -40°C ... +95°C continuous, +150°C short-term

Weathering resistance:

- Very good UV resistance and weathering characteristics

Colour:

- Outer layer: black (protection layer) abrasion and UV resistant
- Intermediate layer: yellow (warning layer)
- Inner layer: red (wear limit reached) conduit should be replaced

Chemical properties:

- Please refer to www.pma.ch (Technical Information / Chemical Resistance)

Environmental properties:

- Free from halogens and cadmium
- RoHS and REACH compliant


XR90-Index

min.					max.
Ductility	[Progressive bar chart showing performance level]				
Fatigue reversed bending	[Progressive bar chart showing performance level]				
Compression resistance	[Progressive bar chart showing performance level]				
Low temperature performance	[Progressive bar chart showing performance level]				
Weathering resistance	[Progressive bar chart showing performance level]				

Product selection:

Part no.	Profile	Conduit size		rec. fitting thread size		Dimensions in mm (nom.)				Weight kg/100 m	Packing unit metre
		NW	metric	PG	metric	d1	d2	stat. R	dyn. R.		
XR90T-17BR	T	17	20	16	M20	16.2	21.1	30	85	7.5	50
XR90T-23BR	T	23	25	21	M25	22.7	28.4	40	110	12.0	50
XR90T-29BR	T	29	32	16	M32	28.6	34.5	50	135	15.0	50
XR90G-17BR	G	17	20	21	M20	15.4	21.1	35	85	7.5	50
XR90G-23BR	G	23	25	29	M25	21.4	28.4	45	110	12.0	50
XR90G-29BR	G	29	32	29	M32	27.2	34.5	55	135	15.0	50
XR90G-36BR	G	36	40	36	M40	35.9	42.4	65	170	19.0	30
XR90G-48BR	G	48	50	48	M50	47.0	54.5	85	220	25.0	30
XR90G-56BR	G	56	68	-	-	56.7	67.5	110	270	33.0	30
XR90G-70BR	G	70	80	-	-	67.8	79.6	130	320	46.0	30

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time

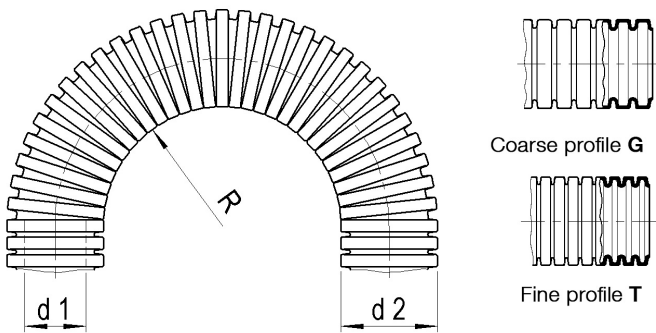

stat. R. = min. bending radius for static (fixed) installation

dyn. R. = min. bending radius for dynamic (flexible) installation

Mechanical Properties:	Value:	Test parameters:	Test method:
Impact strength	>3 J	(+23°C)	PMA DO 9.21-4330
	> 12.2 J	(-18°C)	CSA C22.2 Nr. 227.3 / UL 1696
Compression strength	> 230 N	(50 x 50 mm)	PMA DO 9.21-4320
	> 520 N	(100 x 100 mm)	PMA DO 9.21-4320
Resistance to fatigue	> 4'000'000 cycles		PMA DO 9.21-4420
	> 10'000'000 cycles		PMA DO 9.21-4425
Pull-out resistance conduit - fitting series			
PMAFIX Pro	> 350 N		PMA DO 9.21-4610
PMAFIX IP68	> 300 N		PMA DO 9.21-4610
PMAFIX IP66	> 280 N		PMA DO 9.21-4610
PMAFIX Pro, PMAFIX IP66 & IP68	class 2		IEC EN 61386

Note: Testing at 23°C, 50% r.h., conduit nominal width 17, unless otherwise stated

Thermal properties:	Value:	Test parameters:	Test method:
Continuous application temperature	-40 ... +95°C		PMA DO 9.21-4510
Upper application temperature	+110°C	(20'000 h)	PMA DO 9.21-4360
Short-term	+150°C	(168 h)	PMA DO 9.21-4360

ABB Switzerland Ltd,
PMA Cable Protection
Aathalstrasse 90
8610 Uster, Switzerland
Phone: +41 58 585 00 11
pma-info@ch.abb.com
www.pma.ch

Let's write the future.
Together. **abb.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2019 ABB Installation Products Inc. All rights reserved

