

## TECHNICAL DATA SHEET

# PMA Smart Line - LLPA - Corrugated Conduit

## Very flexible, medium-grade



Very flexible conduit ideal for machine building, installation and construction industries

**Applications:**

- In machine and equipment applications

**Features & Benefits:**

- Very good mechanical characteristics, also under extreme climatic conditions (low temperature and low humidity)
- Self-extinguishing
- Very good flexibility

**Materials:**

- High-grade, specially formulated polyamide 6

**Compatible with:**

- PMAFIX, PMA Smart Line fittings
- PMAGRIP flange
- PMA accessories

**Temperature range:**

- $-40^{\circ}\text{C}$  ...  $+105^{\circ}\text{C}$  continuous,  $+160^{\circ}\text{C}$  short-term

**Conforms to:**

- UL 1696 (UL File E80294)
- CSA C22.2 No. 227.3-05 (CSA File LL 88703)

**Weathering resistance:**

- Good UV resistance and weathering characteristics, particularly in black

**Colour:**


- Black
- Grey

**Chemical properties:**

- Please refer to [www.pma.ch](http://www.pma.ch) (Technical Information / Chemical Resistance)

**Environmental properties:**


- Free from halogens and cadmium
- RoHS and REACH compliant

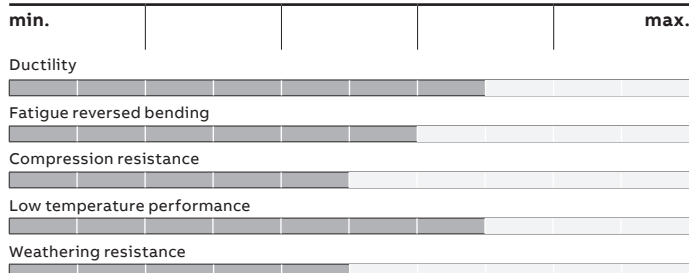**LLPA-Index**

**Product selection:**

Part no.		Profile	Conduit size		rec. fitting thread size		Dimensions in mm (nom.)			Weight	Packing unit
black	grey	T/G	NW	metric	PG	metric	d1	d2	stat. R	kg/100 m	metre
LLPA-07A	LLPA-07S	T	7	10	7	M12 x 1.5	6.6	10.0	15	2.2	50
LLPA-10A	LLPA-10S	T	10	12	9	M12 x 1.5	9.8	12.8	20	2.8	50
LLPA-12A	LLPA-12S	T	12	16	11	M16 x 1.5	12.1	15.6	25	3.8	50
LLPA-17A	LLPA-17S	T	17	20	16	M20 x 1.5	16.8	21.1	35	5.7	50
LLPA-23A	LLPA-23S	T	23	25	21	M25 x 1.5	23.2	28.4	45	9.9	50
LLPA-29A	LLPA-29S	T	29	32	29	M32 x 1.5	28.8	34.5	55	13.3	50
LLPA-36A	LLPA-36S	T	36	40	36	M40 x 1.5	36.7	42.4	65	16.0	30
LLPA-48A	LLPA-48S	T	48	50	48	M50 x 1.5	48.2	54.5	80	22.8	30
LLPAG-17A	LLPAG-17S	G	17	20	16	M20 x 1.5	15.8	21.1	40	6.3	50
LLPAG-23A	LLPAG-23S	G	23	25	21	M25 x 1.5	21.9	28.4	50	9.9	50
LLPAG-29A	LLPAG-29S	G	29	32	29	M32 x 1.5	27.8	34.5	60	13.3	50
LLPAG-36A	LLPAG-36S	G	36	40	36	M40 x 1.5	36.1	42.4	75	16.0	30
LLPAG-48A	LLPAG-48S	G	48	50	48	M50 x 1.5	46.9	54.5	90	22.8	30
LLPAG-56A	LLPAG-56S	G	56	-	-	-	56.7	67.5	120	33.0	30
LLPAG-70A	LLPAG-70S	G	70	-	-	-	67.5	79.6	140	46.0	10
LLPAG-95A	LLPAG-95S	G	95	-	-	-	91.6	107.0	190	66.0	10
LLPAG-125A	LLPAG-125S	G	125	-	-	-	125.5	146.0	260	85.0	6

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time  
 Conduit size NW10 - NW95 UL recognized to UL 1696 (UL file E 80294)  
 Conduit size NW12 - NW48 are CSA C22.2 No. 227.3-05 (CSA File LL 88703)

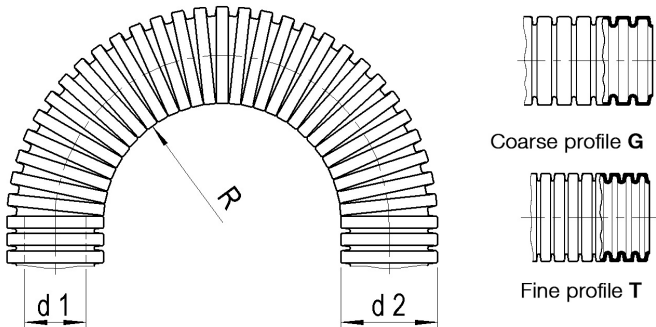

stat. R. = min. bending radius for static (fixed) installation

<b>Mechanical Properties:</b>	<b>Value:</b>	<b>Test parameters:</b>	<b>Test method:</b>
Impact strength	> 4.5 J	(+23°C)	PMA DO 9.21-4330
	> 12.2 J	(-18°C)	UL 1696 / CSA C22.2 Nr. 227.3
	class 3, > 2 J	(-45°C)	IEC EN 61386
	class 4, > 6 J	(-15°C)	IEC EN 61386
	class 5, > 20 J	(+23°C)	IEC EN 61386
Compression strength	> 150 N	(50 x 50 mm)	PMA DO 9.21-4320
	> 300 N	(100 x 100 mm)	PMA DO 9.21-4320
	class 1		IEC EN 61386
Resistance to fatigue	> 50'000 cycles		PMA DO 9.21-4420
	> 100'000 cycles		PMA DO 9.21-4425
	class 3 (pliable)	(-45°C)	IEC EN 61386-22
	class 4 (flexible 5000 cycles)	(-25°C)	IEC EN 61386-23
<b>Pull-out resistance conduit - fitting series</b>			
PMAFIX IP68	> 250 N		PMA DO 9.21-4610
PMAFIX IP66	> 200 N		PMA DO 9.21-4610
PMA Smart Line	> 170 N		PMA DO 9.21-4610
PMA Smart Line, PMAFIX IP66 & IP68	class 1		IEC EN 61386

Note: Testing at 23°C, 50% r.h., conduit nominal width 17, unless otherwise stated

<b>Thermal properties:</b>	<b>Value:</b>	<b>Test parameters:</b>	<b>Test method:</b>
Continuous application temperature	-40 ... +105°C		PMA DO 9.21-4510
Upper application temperature	+120°C	(20'000 h)	PMA DO 9.21-4360
Short-term	+160°C	(168 h)	PMA DO 9.21-4360
Application temperature range	-18 ... +105°C		UL 1696 / CSA C22.2 Nr. 227.3
Application temperature range	-45 ... +105°C		IEC EN 61386

<b>Fire safety properties:</b>	<b>Value:</b>	<b>Test parameters:</b>	<b>Test method:</b>
Fire performance	non flame-propagating		IEC EN 61386
Fire performance	V2		UL 94

ABB Switzerland Ltd,  
PMA Cable Protection  
Aathalstrasse 90  
8610 Uster, Switzerland  
Phone: +41 58 585 00 11  
pma-info@ch.abb.com  
www.pma.ch

Let's write the future.  
Together. **abb.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2019 ABB Installation Products Inc. All rights reserved

