


TECHNICAL DATA SHEET

PMAJACK - F.304 - Steel braid

Stainless

PMA

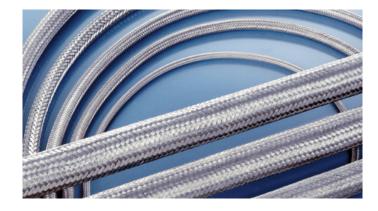

For protection against hot metal shavings and flying sparks



Applications:

- Universal
- In areas with hot metal shavings and flying sparks
- · For high mechanical load

Features & Benefits:

- Coverage: > 90%
- Excellent abrasion properties
- High temperature stability
- Increases mechanical protection of PMA conduits

Materials:

· Stainless steel

Compatible with:

- PMAFIX MONK & MONV Fittings
- PMAFLEX Pro Conduits
- PMAFLEX Multilayer Conduits
- PMAFLEX Conduits
- PMA Smart Line Conduits

Temperature range:

• −70 ... +1000°C

Chemical properties:


Please refer to www.pma.ch
(Technical Information / Chemical Resistance)

Environmental properties:

- Free from halogens and cadmium
- RoHS and REACH compliant

uct selection:								
Part no.	Braid specification	Braid size NW	Range of application		Weight	Packing unit		
	numb. x Ø mm		min. Ø mm	max. Ø mm	kg/100 m	metre		
F.304.10	24 x 7 x 0.3	10	11.0	17.0	12.0	20		
F.304.12	24 x 8 x 0.3	12	11.0	23.0	13.0	20		
F.304.17	24 x 12 x 0.3	17	16.0	27.0	19.0	20		
F.304.23	36 x 9 x 0.3	23	23.0	32.0	24.0	20		
F.304.29	36 x 11 x 0.3	29	27.0	38.0	30.0	20		
F.304.36	36 x 9 x 0.4	36	34.0	45.0	41.0	20		
F.304.48	48 x 10 x 0.4	48	57.0	80.0	66.0	20		

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time



Thermal properties:	Value:	Test parameters:	Test method:
Continuous application temperature	−70 +1000°C		

If used with PMA conduits made from polyamide please consider their operating temperatures $\,$

Content of delivery:

• Steel braid

